

S I G H T  M A R K<sup>®</sup>

USER MANUAL



# CJRK Tactical Riflescope Mount

SM34004

English

## SIGHT MARK<sup>®</sup>

### FEATURES:

- Quick detach weaver/picatinny mount
- Quick detach provides return to zero
- Cantilever design provides proper eye relief on various AR-15 platforms
- Made from durable aluminum
- Matte black, non-reflective finish
- Lightweight
- Works best with scopes having 4" or less eye relief



### TECHNICAL SPECIFICATIONS:

<b>Mount type</b>	<b>Weaver/picatinny</b>
<b>Ring diameter</b>	<b>30mm and 1 inch</b>
<b>Material</b>	<b>Aluminum</b>
<b>Finish</b>	<b>Matte black</b>
<b>Centerline Height</b>	<b>38.1mm</b>
<b>Distance between rings</b>	<b>76mm</b>
<b>Width with QD lever</b>	<b>55mm</b>
<b>Length</b>	<b>175mm</b>
<b>Length with QD lever</b>	<b>198mm</b>
<b>Height</b>	<b>58mm</b>
<b>Weight</b>	<b>8oz</b>

\*Visit our website at [www.sightmark.com](http://www.sightmark.com) to view this manual in other languages.

## DIAGRAM:

1. Mounting Rings
2. Quick Detach Levels
3. 1" Reduction Ring

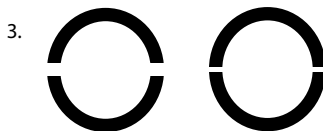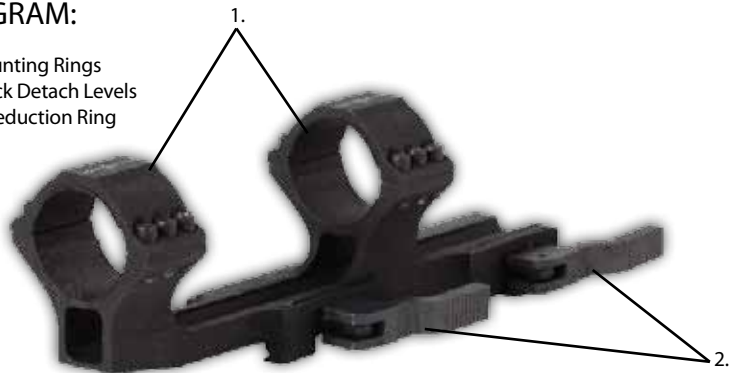

## INCLUDED ACCESSORIES:

- Reduction inserts for 1 inch diameter
- Allen wrench

## WARNING:

Before handling the CJRK tactical riflescope mount read and understand the contents of your firearm's manual, and the Sightmark weapons mount manual. Follow all standard safety precautions and procedures during firearm operation, even when the riflescope is not in use.

- Avoid hitting or dropping the unit.
- ALWAYS check that the chamber of your weapon is clear before mounting or dismounting the riflescope.
- The mount should be tested during periods of non-use to make sure it is still operating properly.

Failure to follow the standard firearm safety precautions and procedures, as well as the above warnings, is dangerous and may result in serious injury, damage to property or death.

## FIREARM INSTALLATION:

It is recommended to have the riflescope mounted by a professional gunsmith. However, if attempting to mount the riflescope without professional assistance please read and strictly adhere to the following directions. It is recommended the rifle be placed in a gun rest or stable platform.

1. Unload the firearm. Remove the bolt/firing pin to ensure the weapon is incapable of firing.
2. Install the one-piece mount onto the weaver or picatinny mount by releasing both quick detach levers (2).
3. Position the mount onto the firearm's weaver or picatinny mount. Align the crossbolt on the rear of the mount between the grooves on the weaver or picatinny mount.
4. Flip the quick-detach lever (2) until it firmly snaps into position.
5. Check if the quick detach lever mount has play or is shifting in a fore-and-aft motion. If the mount has play, the mount's tension is too little. If the quick detach lever is difficult to engage, the mount's tension is too great. Therefore, adjusting the mount's tension is required. See adjusting the quick detach mount.

## ADJUSTING THE QUICK DETACH MOUNT:

1. Release the quick detach mount (2).
2. To tighten the mount, rotate the lever clockwise. To loosen the mount, rotate the lever counter clockwise.
3. Reattach the mount to the firearm and check for a secure fit. Repeat steps 1 and 2 if necessary.

## MOUNTING A RIFLESCOPE:

The Sightmark CJRK tactical riflescope mount can be mounted on 30mm or 1 inch diameter riflescopes. For 1 inch diameter riflescopes, the reduction rings (3) must be used.

1. Using the hex wrench, loosen the six hex screws on the mount's rings (1).
2. Remove the top halves of the rings.
3. Set the riflescope in the rings. For riflescopes with a 1" diameter tube, the bottom half of the reduction inserts must be placed in the rings first.
4. Place the top half of the rings and tighten the hex screws with a light amount of tension so that the riflescope can rotate and move freely. A small amount of removable thread locker may be used.
5. Establish the correct eye relief by holding the firearm in the shooting position. Look through the riflescope and position it so that the image's full field of view is visible.
6. Once the eye relief is established, check the cross hair alignment by pointing the riflescope at an object that is level. Align the cross hair.
7. Once the alignment is checked, tighten the hex screws evenly so the space between the rings is uniform. Do not over-tighten the screws.

## STORAGE

Make sure that your Sightmark CJRK tactical riflescope mount is securely attached to your firearm before storage.

## MAINTENANCE:

The mount may be cleaned with a soft cloth and gun oil when exposed to dirt and dust. Use a small amount of anti-wear, anti-corrosion oil on the quick detach retention springs to maintain smooth operation over time.

## SIGHTMARK LIMITED LIFETIME WARRANTY

Please visit [www.sightmark.com](http://www.sightmark.com) for warranty details and information.

---

S I G H T  M A R K <sup>®</sup>

S I G H T  M A R K<sup>®</sup>

[www.sightmark.com](http://www.sightmark.com)