

S I G H T  M A R K [®]

USER MANUAL



LoPro Green Laser

SM25001

English

ABOUT SIGHTMARK®

Sightmark offers a wide range of products that include red dot scopes, reflex sights, rangefinders, riflescopes, laser sights, night vision, binoculars and award-winning flashlights and boresights. Sightmark products are inspired by military and law enforcement applications. All products are designed to be the most effective weapon accessories possible.


MAKE YOUR MARK

S I G H T  M A R K®

www.sightmark.com

LoPro Green Laser 1-8

English

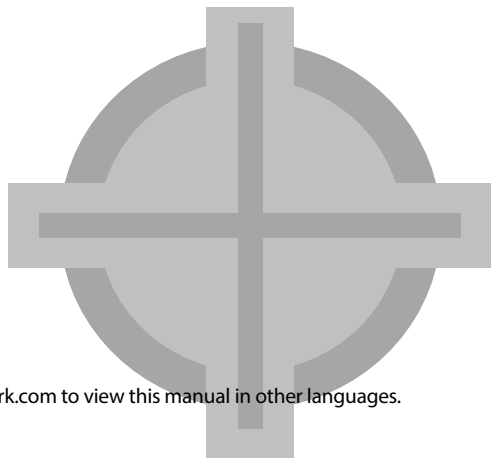

*Visit our website at www.sightmark.com to view this manual in other languages.

ENGLISH

Laser wavelength, nm	532
Laser type	Class IIIA
Laser power output, mW	<5
Dot size (in @ 50yd)	approx. 1.5
Visibility day/night	50 yds/600 yds
Battery type	CR123A
Battery life, hrs	27
Battery voltage, V	3
Maximum recoil, Gs	1000
Adjustment value	1 MOA
Elevation adjustment range, MOA	380
Windage adjustment range, MOA	500
Body material	high performance thermoplastic
Mount type	weaver/picatinny
Dimensions	85x77x38mm
Weight	6.2oz

FEATURES:

- Low profile design
- Reliable and durable
- Weaver/picatinny mount
- Push button or pressure pad operation
- Hand adjustable windage/elevation adjustments
- Weatherproof for rain, snow, and sleet
- Lightweight and shockproof

INCLUDES:

- Pressure pad
- CR123A battery

DIAGRAM:

- 1) Battery cap
- 2) Laser aperture
- 3) Windage/elevation adjustment
- 4) On/off push button
- 5) Pressure pad input jack
- 6) Mounting bolt



WARNINGS AND PRECAUTIONS:

Before handling the laser sight, read and understand the contents of your firearm's manual, warnings, and the Sightmark LoPro manual. Follow all standard safety precautions and procedures during firearm operation, even when the laser sight is not in use.

- Never point the laser sight directly at, or into, an eye. This may cause damage to the eye or blindness.
- Avoid looking directly into the laser.
- Never allow children to use or handle this product
- Avoid shining the laser into mirrors or other reflective surfaces and dropping the unit.
- ALWAYS check that the chamber of your weapon is clear before mounting or dismounting the laser sight.
- ALWAYS remove the laser sight when cleaning, or performing other maintenance on your firearm.
- The laser sight should be tested during periods of non-use to make sure it is still operating properly.

CAUTION: Use of controls or adjustments or performance of procedures other than specified herein may result in hazardous radiation exposure.

Failure to follow standard firearm safety precautions and procedures, as well as the above warnings, is dangerous and may result in:

- Serious injury
- Damage to property
- Death

Distributed by:
Sellmark Corporation
2201 Heritage Parkway
Mansfield, TX 76063



OVERVIEW:

WARNING: Always follow your firearm's instruction manual and warnings. Follow safe firearm practices.

Information about the products:

The Sightmark LoPro Green Laser features a low profile design, allowing it to be mounted in front of a riflescope without interference with field of view. Designed to be mounted on a picatinny or weaver rail for an AR15, the LoPro Green Laser can also be mounted on the side of the quad rail. The laser is offset for clearing front sight post.

Featuring 1 MOA click value adjustments, the hand adjustable windage and elevation turrets allow the user to zero in the laser dot for close range shooting. Visibility ranges from 50 yards in the daytime to 600 yards at night.

Featuring a matte black finish, the LoPro Green Laser is constructed of a high performance thermoplastic, so it is heat and corrosion resistant, impact resistant, waterproof and shockproof.

Reliable and durable, the Sightmark LoPro Green Laser takes one CR123 battery and has 27 hours of battery life and comes with velcro strips so switch can be mounted for easy turn on/off.

MOUNTING:

WARNING: Never attempt to mount the laser sight on a loaded firearm.

To mount the LoPro Laser, please read and strictly adhere to the following directions:

- 1) The LoPro Green Laser comes with a weaver/picatinny mount (6).
- 2) Unload the weapon. Remove the bolt/firing pin to ensure the weapon is incapable of firing.
- 3) Install the laser onto a weaver or picatinny base. Tighten the mounting screws (6) between 45-65" pounds of torque.
- 4) Once the alignment is checked, tighten the mounting screws. A flathead screw driver can be used to tighten the mount.
- 5) Next, zero the sight.



INSTALLING THE BATTERY:

The Sightmark LoPro Green Laser is powered by one CR123A battery. Should the laser grow dim or not activate, the battery needs to be replaced. To install a new battery:

- 1) Unscrew the battery cap (1) counterclockwise and remove the battery
- 2) Insert a new battery with the positive (+) side facing up.
- 3) Screw the battery cap clockwise. Do not overtighten.

OPERATING THE LASER:

In order to activate the LoPro Green Laser locate the on/off push button (4).

- 1) Push the button down and a click should be heard. The laser will activate.
- 2) Repeat step 1. Once the click is heard the laser will deactivate.

In order to activate the LoPro Green Laser with the pressure pad.

- 1) Locate the pressure pad input jack (5) on the back of the laser housing.
- 2) Remove the rubber cover from the pressure pad input jack. The rubber cover remains attached to the housing.
- 3) Insert the pressure pad's jack plug into the input jack.
- 4) For momentary activation, press firmly on the pressure pad. A click should be heard and felt.
- 5) To turn the laser off, release pressure off the pressure pad. A click should be heard and felt.

ZEROING THE LASER:

WARNING: Make sure to follow the firearm instruction manual and warnings.

Zeroing and test firing should be performed safely on a firing range. Laser boresights are a quick and accurate method to sighting in all weapon sights. If the firearm's optical sight is already zeroed, the laser can be zeroed by aligning the laser dot to the crosshair's center. Adjustments to the laser dot are made by operating the windage and elevation adjustments.

OPERATING WINDAGE AND ELEVATION ADJUSTMENTS:

In order to make windage and elevation adjustments:

- 1) Locate the windage and elevation adjustments (3).
- 2) Use your hand to make adjustments. The turrets are large enough that adjustments can be made with gloves on. The windage and elevation adjustments are 1 MOA, meaning that 1 click moves the point of impact 1 inch at 100 yards. Adjustments can be both felt and heard allowing the shooter to make adjustments without looking at the dials.
- 3) Adjustments remain zeroed, and no locking mechanism is needed.

NOTE: When mounted in front of most 3x magnification scopes or higher, the elevation adjustment will clear the field of view and not interfere with the scope's image.

MAINTENANCE

Proper maintenance of the Sightmark LoPro Green Laser is recommended to ensure longevity. It is recommended that when the sight becomes dirty that it is wiped down with a dry or slightly damp cloth. To clean off dirt and debris from the laser's aperture, make sure the laser is deactivated. It is recommended to remove the battery to ensure the laser will not activate during maintenance procedures. Clean the aperture lens with a lens cleaning cloth. No further maintenance is required.

TROUBLESHOOTING

Never ship back a product without getting proper authorization beforehand. Doing so could result in losing the laser sight due to a multitude of reasons, i.e. sending it to the wrong address and other problems associated with unexpected packages.

If the LoPro green laser does not hold zero:

- 1) Check that the firearm's mount is securely attached. Also, verify the laser sight is mounted securely to the rifle. If there is any shifting, retighten the mounting system according to the mounting instructions but do not over tighten. The sight will need to be re-zeroed afterwards.
- 2) When test firing a rifle to check that the point of impact is relative to windage and elevation adjustments, firing from a shooting rest will help eliminate shifting during firing.
- 3) Be sure to use factory-loaded ammunition of the same bullet type, weight and preferably, lot number.

If the product does not turn on:

- 1) Check that the battery is in working order. Also, check that the polarity of the battery is correct.
- 2) Check that there is no residue, film or corrosion on the battery contacts that may be preventing the unit from activating.

SIGHTMARK WARRANTY

Please visit www.sightmark.com for warranty details and information.



www.sightmark.com



Distributed by:
Sellmark Corporation
2201 Heritage Parkway
Mansfield, TX 76063

S I G H T  M A R K [®]

www.sightmark.com